


**P.C. board plug-in connectors**

Connector




5,08 mm

**PKB 1100/... /5,08**

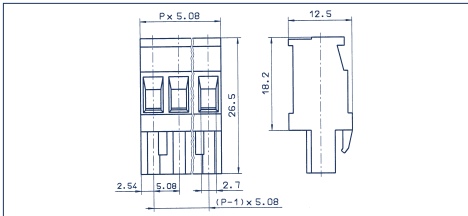

**PKB 1110/... /5,08**

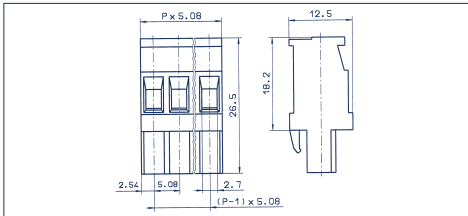

**Drawings**

**Connection principle**

**Dimensions**

Spacing mm  
Insulation stripping length mm  
PCB hole diameter mm

**Connection data**

Single wire (solid) mm<sup>2</sup>  
Stranded wire (flexible) mm<sup>2</sup>  
Stranded wire (with ferrules) mm<sup>2</sup>

**Output information**

Rated voltage V  
Rated current A  
Cross section max. AWG/mm<sup>2</sup>  
Rated surge voltage  
Rated torque/Screw size  
Contamination degree

**Materials**

Insulating material/Flammability class  
Temperature Range  
Clamping part  
Clamping cage/Eccentric  
Contact pin  
Cage tension spring  
Wire protection  
Soldering lug  
Contact Spring

**Order information**

Standard colour(s)  
(further colours on request, see page 5)

**Strain-relief-clamp**

5,08

7,00

–

2,50

2,50

2,50



300 V

15 A

22-10

–

–

–



250 V

12 A (T60)

2,50

4,00 kV

0,50 Nm/M3

3

**Strain-relief-clamp**

5,08

7,00

–

2,50

2,50

2,50



300 V

15 A

22-10

–

–

–



250 V

12 A (T60)

2,50

4,00 kV

0,50 Nm/M3

3

PA 6.6 V0 / UL 94 V0

-30°C / +105°C

CuZn

–

–

–

–

–

–

CuSn

PA 6.6 V0 / UL 94 V0

-30°C / +105°C

CuZn

–

–

–

–

–

–

CuSn

**No. of poles**

**Cat.-No.**

**Qty.p.pck.**

●

●

●

**No. of poles**

**Cat.-No.**

**Qty.p.pck.**

●

●

●

No. of poles	Cat.-No.	Qty.p.pck.	No. of poles	Cat.-No.	Qty.p.pck.
	green (Ral 6018)			green (Ral 6018)	
2	11305.1	50	2	11339.1	50
3	11306.1	50	3	11340.1	50
4	11307.1	50	4	11341.1	50
5	11308.1	50	5	11342.1	50
6	11309.1	50	6	11343.1	50
7	11310.1	50	7	11344.1	50
8	11311.1	50	8	11345.1	50
9	11312.1	50	9	11346.1	50
10	11313.1	50	10	11347.1	50
11	11314.1	50	11	11348.1	50
12	11315.1	50	12	11349.1	50
13	11316.1	50	13	11350.1	50
14	11317.1	50	14	11351.1	50
15	11318.1	50	15	11352.1	50
16	11319.1	50	16	11353.1	50

**Accessories**

Marking Page 126 - 129  
Coding Page 124 - 125

Page 126 - 129  
Page 124 - 125