


High Voltage Fast Recovery Specification Sheet

5mA HIGH VOLTAGE FAST RECOVERY RECTIFIER

Part Number	Max. Avg. Forward Current	Peak Inverse Voltage	Max. Fwd Surge Current 1 Cycle	Max. Fwd Voltage @TA 25°C @ 10mA	Max. Reverse Current @ 25°C @ Rated PIV	Reverse Recovery Time	
	I _O (A)	PIV (V)	I _{FSM} (A)	V _{FM} (A)	I _R (uA)	(mSec)	V _{vr} (V)
FV5M-04	5 mA	4000	1	12.0	5	100 @ I _F 2mA	14.4
FV5M-05	5 mA	5000	1	16.0	5		7.2
FV5M-06	5 mA	6000	1	20.0	5		9.0
FV5M-08	5 mA	8000	1	25.0	5		12.0
FV5M-10	5 mA	10000	1	30.0	5		14.4
FV5M-12	5 mA	12000	1	37.5	5		18.0
FV5M-14	5 mA	14000	1	42.5	5		20.4
FV5M-16	5 mA	16000	1	50.0	5		24.0
FV5M-18	5 mA	18000	1	55.0	5		26.4
FV5M-20	5 mA	20000	1	62.5	5		30.0
FV5M-22	5 mA	22000	1	62.5	5		30.0
FV5M-24	5 mA	24000	1	75.0	5		36.0

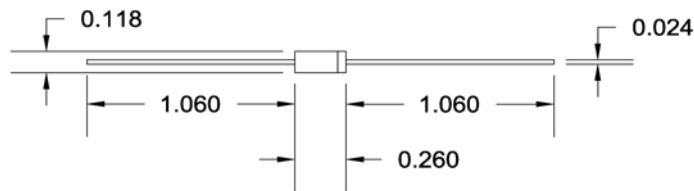

Max Dimensions (in inches)