

**CONTA-CLIP**

CONTA CONNECT  
CABLE ENTRY SYSTEM **KDSClick**



**KDS**   
**CLICK**

by CONTA-CLIP

**Cable entry system KDSClick**

# TURNING CABLES INSIDE OUT!

## a revolutionary cable entry system!

Fast. Safe. Very simple. Our KDSClick cable entry system is a cable management solution for switchgear cabinets, housings and machines that features secure seals and strain relief for pre-assembled and non-assembled cables – with or without connectors. KDSClick saves you time and provides you with maximum versatility.

It's easy.  
It's quick.  
It's **KDSClick**.



# THREE PARTS, MANY SOLUTIONS!

**A frame. An inlay. A seal.**

**The modular design of these three basic components guarantees maximum versatility, variability and variety.**

## 1. Frame

Made from a single mould, the one-piece frame is quick and easy to assemble. It is made of sturdy, glass-fibre reinforced plastic. The foamed seal guarantees an optimal seal with IP66 protection, even on painted or rough surfaces.



## 2. Inlay

The click-in inlays allow for a requirements-based dimensioning of the frame opening for the seal being used. An audible "click" confirms a correct installation. So you can variably configure cable entries to match various requirements (for cables, lines, tubing, pneumatic and hydraulic lines).



## 3. Seal

The seal's tapered shape allows it to be easily pressed in; it reliably seals the gaps and provides strain relief working towards accordance with DIN EN 62444. The seals are installed by pressing them from the inside outwards into the openings of the previously installed inlays. Their wave-cut profile makes them easy to install and ensures a perfect fit around the cables.

There are currently 82 different seals that can be used for sealing cables of various diameters and sizes.



## Your benefits: more versatility and safety

**The seals can be removed by pressing from the outside inwards. Changes, retrofits, service work or the readjustment of cable lengths can be made when needed without removing the frame.**


**An optional inner locking frame can be used to prevent the possibility of unwanted external manipulation.**

**Cable entry system KDSClick**

# THE OVERWHELMING BENEFITS OF KDSClick!

**Intelligently split seals**

Their wave-cut profile split makes them easy to install and ensures a perfect fit around the cables.

**Quick inside-outwards assembly for easier servicing work**

The frame does not need to be disassembled if your requirements change or if you're carrying out service work.

**No loss of guarantee during cable assembly**


No need to disassemble and reconnect connectors, so manufacturer's warranty is not voided.

**Very versatile high-density assemblies are possible**

1-way, 2-way, and 4-way seals provide you with excellent versatility for cable management


**Attaching the frame**

The one-piece frame can be easily and quickly attached to the wall.



# KDS CLICK

by CONTA-CLIP

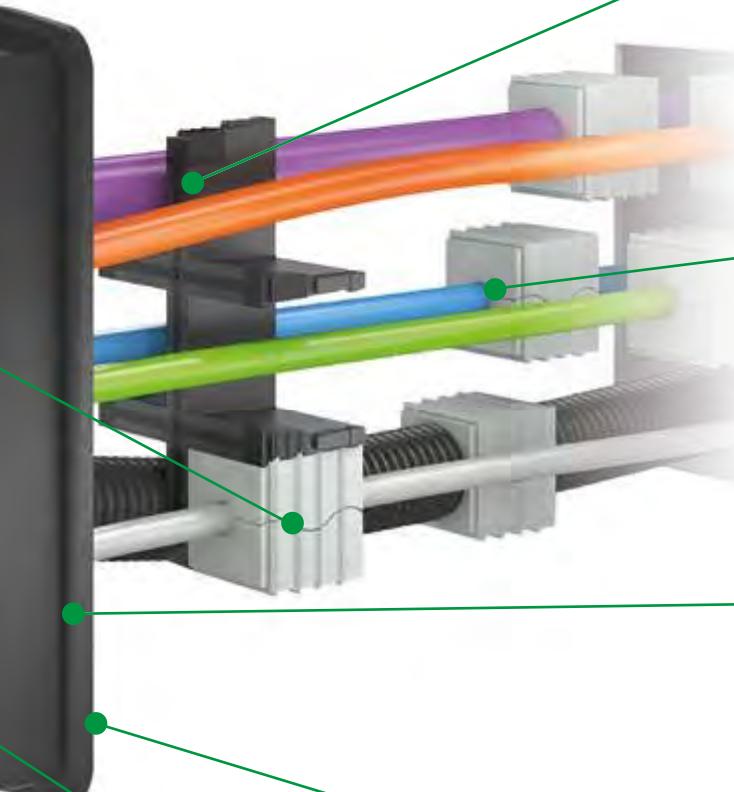

## Outstanding seal: IP66 protection

Multi-resistant, tapered seals feature inner and outer sealing gills.

## Integrated strain relief

The secure fit of the seals ensures a strain relief mechanism for the cables, working towards accordance with DIN EN 62444.

## Safe and quick installation with audible feedback

An audible "click" confirms that the inlay has been correctly installed into the frame.

## Maximum versatility with optimized warehousing

The frames, inlays and seals can be combined in many ways – ensuring you many versatile configuration options.

## Can be used from – 40 °C to + 120 °C

Materials contain no halogen or silicone, suitable for many different applications.

## KDSClick: Frames and inlays

### Features:

- Material: Polyamide PA 6.6, glass-fibre reinforced | TPE
- Colour: black
- Flammability: UL94 V-0
- Temperature range: – 40 °C to + 120 °C
- Halogen-free, silicone-free
- Protection: IP66

## KDS-SR 1-4

### Combinations



Type	Cat. no.	Description	Qty.
KDS-SR 1-4 BK	<b>28506.4</b>	Screw frame	1
KDS-Set 1-4 BK	<b>28602.4</b>	<b>Set consists of:</b> 1 x KDS-SR 1-4 BK, 1 x KDS-Inlay 4 BK	1

### Accessories

Type	Cat. no.	Description	Qty.
KDS-Inlay 4 BK	<b>28518.4</b>	Inlay for 4-way splits	5
KDS-IVR 1-4 BK	<b>28507.4</b>	Inner locking frame (optional)	10

Seal	Cat. no.		
KDS-DE	Page 10	Small seals	10
KDS-DEG	Page 10	Large seals	10

## KDS-SR 6/10

### Combinations



Type	Cat. no.	Description	Qty.
KDS-SR 6/10 BK	<b>28500.4</b>	Screw frame	1
KDS-Set 6/10 BK	<b>28603.4</b>	<b>Set consists of:</b> 1 x KDS-SR 6/10 BK, 1 x KDS-Inlay 2 BK, 1 x KDS-Inlay 6 BK	1

### Accessories


Type	Cat. no.	Description	Qty.
KDS-Inlay 2 BK	<b>28517.4</b>	Inlay, T-shape	5
KDS-Inlay 6 BK	<b>28519.4</b>	Inlay for 6-way splits	5
KDS-IVR 6/10 BK	<b>28501.4</b>	Inner locking frame (optional)	10

Seal	Cat. no.		
KDS-DE	Page 10	Small seals	10
KDS-DEG	Page 10	Large seals	10

## KDS-SR 8/16



### Combinations

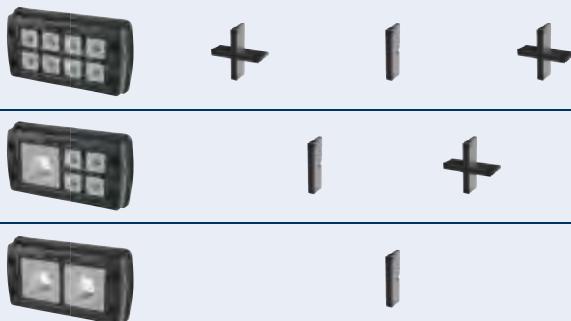

Type	Cat. no.	Description	Qty.
KDS-SR 8/16 BK	<b>28502.4</b>	Screw frame	1
KDS-Set 8/16 BK	<b>28604.4</b>	<b>Set consists of:</b> 1 x KDS-SR 8/16 BK, 1 x KDS-Inlay 1 BK, 2 x KDS-Inlay 4 BK	1

### Accessories

Type	Cat. no.	Description	Qty.
KDS-Inlay 1 BK	<b>28516.4</b>	Inlay for vertical split	5
KDS-Inlay 4 BK	<b>28518.4</b>	Inlay for 4-way splits	5
KDS-IVR 8/16 BK	<b>28503.4</b>	Inner locking frame (optional)	10

Seal	Cat. no.		
KDS-DE	Page 10	Small seals	10
KDS-DEG	Page 10	Large seals	10

## KDS-SR 10/24



### Combinations



Type	Cat. no.	Description	Qty.
KDS-SR 10/24 BK	<b>28504.4</b>	Screw frame	1
KDS-Set 10/24 BK	<b>28605.4</b>	<b>Set consists of:</b> 1 x KDS-SR 10/24 BK, 1 x KDS-Inlay 1 BK, 1 x KDS-Inlay 2 BK, 1 x KDS-Inlay 4 BK, 1 x KDS-Inlay 6 BK	1

### Accessories

Type	Cat. no.	Description	Qty.
KDS-Inlay 1 BK	<b>28516.4</b>	Inlay for vertical split	5
KDS-Inlay 2 BK	<b>28517.4</b>	Inlay, T-shape for large small	5
KDS-Inlay 4 BK	<b>28518.4</b>	Inlay for 4-way splits	5
KDS-Inlay 6 BK	<b>28519.4</b>	Inlay for 6-way splits	5
KDS-IVR 10/24 BK	<b>28505.4</b>	Inner locking frame (optional)	10

Seal	Cat. no.		
KDS-DE	Page 10	Small seals	10
KDS-DEG	Page 10	Large seals	10

# All-round Solutions!

For metric break-outs, CONTA-CLIP provides separable cable glands from M20 to M63 for cables with or without connectors. During servicing or retrofitting with pre-assembled cable harnesses, cables with diameters from 2 to 35 mm can quickly and safely be guided into the switch-gear cabinet or housing, and then sealed to IP66. The divisible system ensures quick and simple assembly. The slotted seal has a wave-cut profile that ensures a reliable seal and a totally secure attachment. The seal is first placed around the cable and then inserted in one of the two halves.

Depending on the size of the cable gland, up to four seals can be inserted. After that, the two halves of the cable gland are easily snapped together without the use of any tools. A locknut (which can also be separated) on the inside of the cabinet ensures a safe and secure attachment.



## Outstanding seal: IP66 protection

Multi-resistant, tapered seals feature inner and outer sealing gills.

## Intelligently split seals

Their wave-cut profile makes them easy to install and ensures a perfect fit around the cables.

## Maximum versatility

More than 80 different seal variants are available.

## Versatile assembly

Up to four assembled cables can be used with one cable gland.

## Separable locknut

Easy to attach to cables that have already been guided through.

## The advantages

- Assembled cables can be guided through
- Guarantee retained for assembled cables
- Retrofitting and service work is quick and causes
- High-density assemblies
- Can be installed on standard metric break-outs
- Includes a separable hexagon nut

# KDSClick: separable cable glands

## Features:

- Material: Polyamide PA 6.6, glass-fibre reinforced | TPE
- Colour: black
- Flammability: UL94 V-0

- Temperature range: - 40 °C to +120 °C
- Halogen-free, silicone-free
- Protection: IP66




## KDS-KV, small version

### Combinations



			Cable diameter mm		
Type	Cat. no.	Description	KDS-DE	KDS-DEG	Qty.
KDS-KV M20 BK	<b>28610.4</b>	Separable cable gland, including separable locknut	1-13	-	10
KDS-KV M25 BK	<b>28611.4</b>	Separable cable gland, including separable locknut	1-14	-	10
KDS-KV M32 BK	<b>28612.4</b>	Separable cable gland, including separable locknut	1-14	-	10
<b>Accessories</b>					
Type	Cat. no.	Description			Qty.
KDS-GM 20 BK	<b>28616.4</b>	Separable locknut			10
KDS-GM 25 BK	<b>28617.4</b>	Separable locknut			10
KDS-GM 32 BK	<b>28618.4</b>	Separable locknut			10
<b>Seal</b>	<b>Cat. no.</b>				
KDS-DE	Page 10	Small seals			10

### Dimensional drawings






## KDS-KV, large version

### Combinations



			Cable diameter mm		
Type	Cat. no.	Description	KDS-DE	KDS-DEG	Qty.
KDS-KV M40 BK	<b>28613.4</b>	Separable cable gland, including separable locknut	1-2	14-33	5
KDS-KV M50 BK	<b>28614.4</b>	Separable cable gland, including separable locknut	1-10	14-33	5
KDS-KV M63 BK	<b>28615.4</b>	Separable cable gland, including separable locknut	1-10	14-33	5
<b>Accessories</b>					
Type	Cat. no.	Description			Qty.
KDS-Inlay 4 BK	<b>28518.4</b>	Inlay for 4-way splits			5
KDS-GM 40 BK	<b>28619.4</b>	Separable locknut			5
KDS-GM 50 BK	<b>28620.4</b>	Separable locknut			5
KDS-GM 63 BK	<b>28621.4</b>	Separable locknut			5
<b>Seal</b>	<b>Cat. no.</b>				
KDS-DE	Page 10	Small seals			10
KDS-DEG	Page 10	Large seals			10

### Dimensional drawings



## KDSClick: Seal

## Features of black seals

- Material: TPE
- Halogen-free, silicone-free
- Flammability: UL94 HB
- Excellent resistance to chemicals
- Temperature range: - 40 °C to +120 °C (static)
- UV-stabilized
- Protection: IP66



## Seals, black small

Type	Cat. no.:	Max. ø	Qty.
KDS-DE/B BK	<b>28520.4</b>	Blind	10
KDS-DE 1-2 BK	<b>28521.4</b>	2 mm	10
KDS-DE 2-3 BK	<b>28522.4</b>	3 mm	10
KDS-DE 3-4 BK	<b>28523.4</b>	4 mm	10
KDS-DE 4-5 BK	<b>28524.4</b>	5 mm	10
KDS-DE 5-6 BK	<b>28525.4</b>	6 mm	10
KDS-DE 6-7 BK	<b>28526.4</b>	7 mm	10
KDS-DE 7-8 BK	<b>28527.4</b>	8 mm	10
KDS-DE 8-9 BK	<b>28528.4</b>	9 mm	10
KDS-DE 9-10 BK	<b>28529.4</b>	10 mm	10
KDS-DE 10-11 BK	<b>28530.4</b>	11 mm	10
KDS-DE 11-12 BK	<b>28531.4</b>	12 mm	10
KDS-DE 12-13 BK	<b>28532.4</b>	13 mm	10
KDS-DE 13-14 BK	<b>28533.4</b>	14 mm	10

## Seals, black large

Type	Cat. no.:	Max. ø	Qty.
KDS-DEG/B BK	<b>28534.4</b>	Blind	10
KDS-DEG 14-15 BK	<b>28535.4</b>	15 mm	10
KDS-DEG 15-16 BK	<b>28536.4</b>	16 mm	10
KDS-DEG 16-17 BK	<b>28537.4</b>	17 mm	10
KDS-DEG 17-18 BK	<b>28538.4</b>	18 mm	10
KDS-DEG 18-19 BK	<b>28539.4</b>	19 mm	10
KDS-DEG 19-20 BK	<b>28540.4</b>	20 mm	10
KDS-DEG 20-21 BK	<b>28541.4</b>	21 mm	10
KDS-DEG 21-22 BK	<b>28542.4</b>	22 mm	10
KDS-DEG 22-23 BK	<b>28543.4</b>	23 mm	10
KDS-DEG 23-24 BK	<b>28544.4</b>	24 mm	10
KDS-DEG 24-25 BK	<b>28545.4</b>	25 mm	10
KDS-DEG 25-26 BK	<b>28546.4</b>	26 mm	10
KDS-DEG 26-27 BK	<b>28547.4</b>	27 mm	10
KDS-DEG 27-28 BK	<b>28548.4</b>	28 mm	10
KDS-DEG 28-29 BK	<b>28549.4</b>	29 mm	10
KDS-DEG 29-30 BK	<b>28550.4</b>	30 mm	10
KDS-DEG 30-31 BK	<b>28551.4</b>	31 mm	10
KDS-DEG 31-32 BK	<b>28552.4</b>	32 mm	10
KDS-DEG 32-33 BK	<b>28601.4</b>	33 mm	10

## Cone-shaped seals, black

Type	Cat. no.:	Max. ø	Qty.
KDS-DE/K 2-11 BK	<b>28553.4</b>	11 mm	10
KDS-DEG/K 7-24 BK	<b>28554.4</b>	24 mm	10



## Seals, black with multiple holes

Type	Cat. no.:	Max. ø	Qty.
KDS-DE 2X4-5 BK	<b>28555.4</b>	5 mm	10
KDS-DE 2X5-6 BK	<b>28556.4</b>	6 mm	10
KDS-DE 4X2-3 BK	<b>28557.4</b>	3 mm	10
KDS-DE 4X3-4 BK	<b>28558.4</b>	4 mm	10



## Seals, black AS-Interface cables

Type	Cat. no.:	Qty.
KDS-DE/1XASI BK	<b>28559.4</b>	10
KDS-DE/2XASI BK	<b>28560.4</b>	10



## Features of grey seals

- Material: TPE
- Halogen-free, silicone-free
- Flammability: UL94 V-0
- Excellent resistance to chemicals
- UV-stabilized
- Protection: IP66
- Temperature range: - 40 °C to 90 °C (static)



## Seals, grey small

Type	Cat. no.:	Max. ø	Qty.
KDS-DE/B GR	<b>28561.6</b>	Blind	10
KDS-DE 1-2 GR	<b>28562.6</b>	2 mm	10
KDS-DE 2-3 GR	<b>28563.6</b>	3 mm	10
KDS-DE 3-4 GR	<b>28564.6</b>	4 mm	10
KDS-DE 4-5 GR	<b>28565.6</b>	5 mm	10
KDS-DE 5-6 GR	<b>28566.6</b>	6 mm	10
KDS-DE 6-7 GR	<b>28567.6</b>	7 mm	10
KDS-DE 7-8 GR	<b>28568.6</b>	8 mm	10
KDS-DE 8-9 GR	<b>28569.6</b>	9 mm	10
KDS-DE 9-10 GR	<b>28570.6</b>	10 mm	10
KDS-DE 10-11 GR	<b>28571.6</b>	11 mm	10
KDS-DE 11-12 GR	<b>28572.6</b>	12 mm	10
KDS-DE 12-13 GR	<b>28573.6</b>	13 mm	10
KDS-DE 13-14 GR	<b>28574.6</b>	14 mm	10

## Seals, grey large

Type	Cat. no.:	Max. ø	Qty.
KDS-DEG/B GR	<b>28575.6</b>	Blind	10
KDS-DEG 14-15 GR	<b>28576.6</b>	15 mm	10
KDS-DEG 15-16 GR	<b>28577.6</b>	16 mm	10
KDS-DEG 16-17 GR	<b>28578.6</b>	17 mm	10
KDS-DEG 17-18 GR	<b>28579.6</b>	18 mm	10
KDS-DEG 18-19 GR	<b>28580.6</b>	19 mm	10
KDS-DEG 19-20 GR	<b>28581.6</b>	20 mm	10
KDS-DEG 20-21 GR	<b>28582.6</b>	21 mm	10
KDS-DEG 21-22 GR	<b>28583.6</b>	22 mm	10
KDS-DEG 22-23 GR	<b>28584.6</b>	23 mm	10
KDS-DEG 23-24 GR	<b>28585.6</b>	24 mm	10
KDS-DEG 24-25 GR	<b>28586.6</b>	25 mm	10
KDS-DEG 25-26 GR	<b>28587.6</b>	26 mm	10
KDS-DEG 26-27 GR	<b>28588.6</b>	27 mm	10
KDS-DEG 27-28 GR	<b>28589.6</b>	28 mm	10
KDS-DEG 28-29 GR	<b>28590.6</b>	29 mm	10
KDS-DEG 29-30 GR	<b>28591.6</b>	30 mm	10
KDS-DEG 30-31 GR	<b>28592.6</b>	31 mm	10
KDS-DEG 31-32 GR	<b>28593.6</b>	32 mm	10
KDS-DEG 32-33 GR	<b>28594.6</b>	33 mm	10



## Seals, grey with multiple holes

Type	Cat. no.:	Max. ø	Qty.
KDS-DE 2X4-5 GR	<b>28595.6</b>	5 mm	10
KDS-DE 2X5-6 GR	<b>28596.6</b>	6 mm	10
KDS-DE 4X2-3 GR	<b>28597.6</b>	3 mm	10
KDS-DE 4X3-4 GR	<b>28598.6</b>	4 mm	10




## Seals, black AS-Interface cables

Type	Cat. no.:	Qty.
KDS-DE/1XASI GR	<b>28599.6</b>	10
KDS-DE/2XASI GR	<b>28600.6</b>	10


## KDSClick: Diagrams

### KDS-SR 1-4

#### Dimension diagram

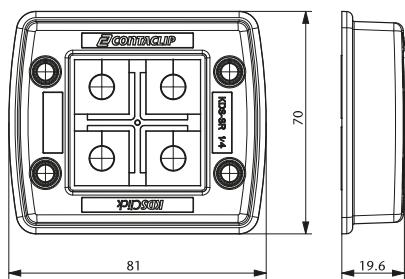


#### Mounting cutout




Torque for the frame's mounting screw: 2.5 – 3 Nm

### KDS-SR 6/10

#### Dimension diagram

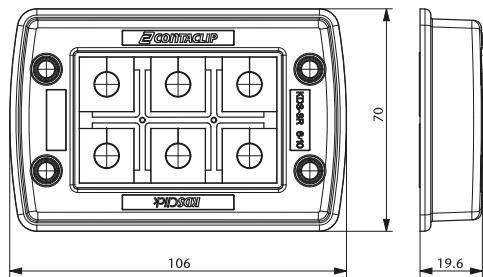


#### Mounting cutout

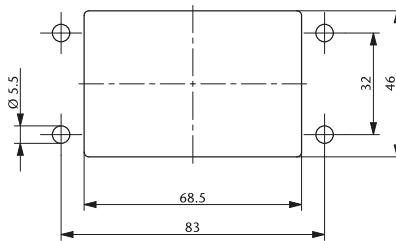


Torque for the frame's mounting screw: 2.5 – 3 Nm

### KDS-SR 8/16

#### Dimension diagram

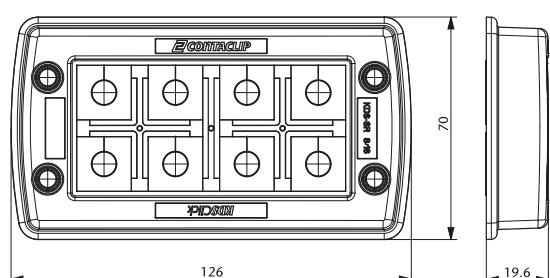


#### Mounting cutout

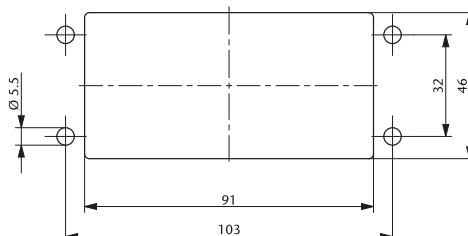


Torque for the frame's mounting screw: 2.5 – 3 Nm

### KDS-SR 10/24

#### Dimension diagram

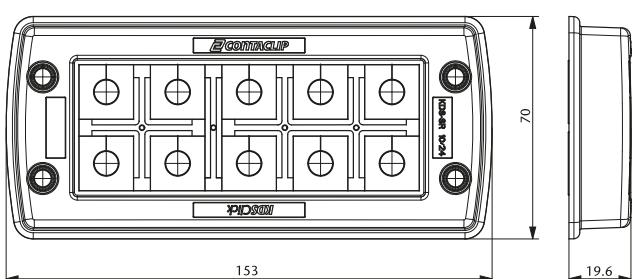

#### Mounting cutout

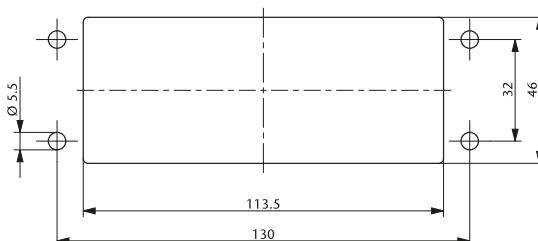

Supported by:



Federal Ministry  
for Economic Affairs  
and Energy

on the basis of a decision  
by the German Bundestag



[www.kdsclick.com](http://www.kdsclick.com)


This brochure contains supplemental information describing our connection system products.

For our entire product range, please refer to our CONTA-CONNECT catalogue, or check our web page at [www.conta-clip.com](http://www.conta-clip.com).

**CONTA-CONNECT**  
[Connection Systems]



**CONTA-ELECTRONICS**  
[Electronics]



**CONTA-CON**  
[PCB Connectors]



EN 03 | 17 All rights reserved.