

**Plug:** UC-004 NEMA 5-15P

**End Treatment:** UC-005 IEC 60320/C13

**Wire:** SVT 18/3 (CEE Color Code) FT1 Flame Rating

**Temperature:** 60°C

**Color:** Black

**Amperage:** 10A

**Voltage:** 125V

**Packing Qty:** 100/Carton

**Length:** 7'6"

**Approvals:** UL (America), cUL (Canada), CSA (Canada)

**Put Up:** Hank & Tie

**Approval:**   



RoHS  
2002/95/EC

**Configuration Standard:** NEMA 5-15P Plug

**Approvals:** UL (America), cUL (Canada), CSA (Canada)

**Amperage:** 15A

**Voltage:** 125V

**Approval:**   

**Applicable Wire Type/Size:**

18/3 AWG (10A/125V):

SPT-1, SPT-2, SPT-3, S, SO, SJ, SJO, SVT, SVTO, SJT, SVT shielded, SJT shielded, SJTW, STO, STOW, ST, STW, SJTO, SJTOW, HPN

17/3 AWG (12A/125V):

SPT-1, SPT-2, SPT-3, S, SO, SJ, SJO, SVT, SVTO, SVT shielded, SJTW, STO, STOW, ST, STW, SJTO, SJTOW, HPN

16/3 AWG (13A/125V):

SPT-2, SPT-3, SJT, S, SO, SJ, SJO, SJT shielded, SJTW, ST, STW, STO, STOW, SJTO, SJTOW


16/3 AWG (15A/125V): HPN

14/3 AWG (15A/125V):

S, SO, SJ, SJO, SJT shielded, SJTW, SJTO, SJTOW, ST, STW, STO, STOW, SPT-3

12/3 AWG (15A/125V):

S, SO, SJ, SJO, SJT, SJTW, ST, STW, STO, STOW, SPT-3

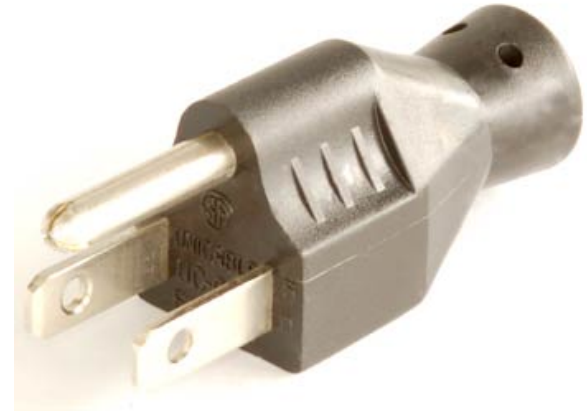

**Configuration Standard:** European IEC 60320/C13 Connector

**Approvals:** UL (America), cUL (Canada), CSA (Canada)

**Amperage:** 15A

**Voltage:** 250V

**Approval:**   

**Applicable Wire Type/Size:**

18/3 AWG (10A/250V):

SPT-2, NISPT-2, S, SO, SVT, SVT shielded, SJT  
SJT shielded, SJTO, SJTOW, SJTW, STO, STOW

16/3 AWG (13A/250V):

SPT-2, NISPT-2, SJT, SJTO, SJTOW, SJTW, SJT shielded  
STO, STOW

14/3 AWG (15A/250V):

SJT, SJTO, SJTOW, SJTW, SJT shielded

